

Trener Post Light Installation Instructions




Product Specifications		
Model No.	HV1671W-BLK	HV1673W-BLK
Name	Trener	Trener
Material	Aluminium Body + Plastic Cover	Aluminium Body + Plastic Cover
Colour	Black	Black
IP Rating	IP44	IP44
Installation Type	Ground - Surface Mounted	Ground - Surface Mounted
Protection Class	1 (240v Requires Earth) ⚡	1 (240v Requires Earth) ⚡
Input Voltage	240v AC	240v AC
Lamp Base	E27	E27
Lamp Wattage	1x 8w	3x 8w
Colour Temp	2700k	2700k
Lumens	700lm	3x 700lm
CRI	> 80	> 80
Dimmable	Yes - Triac	Yes - Triac
Warranty	3 Years Replacement*	3 Years Replacement*


Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Lighting does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- Aluminium and 304SS fittings must not be installed within 5km of any salt water environments.
- All o-rings and seals must be in place correctly to maintain warranty
- This form may be updated at any time due to product improvements, please check online installation form for most current version.

HV1671W-BLK Dimensions



HV1673W-BLK Dimensions

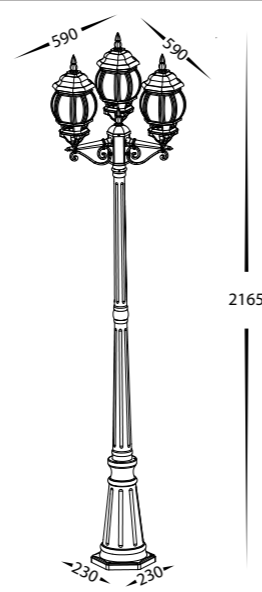

Steps for Installation:

- Make sure that the electrical circuit is free of voltage (master switch off)
- Remove top from post by undoing screws on side
- Slide in additional heads and tighten nuts.
- Reattach top and tighten screws
- Attach top of heads and tighten screws
- Insert cable into post extension piece 1 then insert cable into post extension piece 2
- Attach Post extension 1 to post extension 2
- Using base, mark out holes in concrete base using base as template
- If there is an existing concrete pad, Drill holes and insert plugs, If concrete needs to be poured using bolts and triangular piece and insert into concrete when poured.
- Slide cable through base and Connect the cable - use wire with earth; connect the earth first, then live and neutral wire.
- Make sure connections are weatherproof to avoid any water ingress into connections.
- Attach assembled post to base using screws provided
- Slide base over holes or bolts and insert screw into plugs and tighten or tighten nuts if bolts are installed
- Apply silicon around edge of base to prevent any water from getting inside to electrical connections.
- All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

Must be installed by a licensed electrician

Contact Details:

143 Beauchamp Road
Matraville NSW 2036
Australia
Tel: 02 9381 8300
Fax: 02 9666 8881
Email: sales@havit.com.au
Web: www.havit.com.au



Warranty Terms & Conditions*



www.havit.com.au



HV1671W-BLK

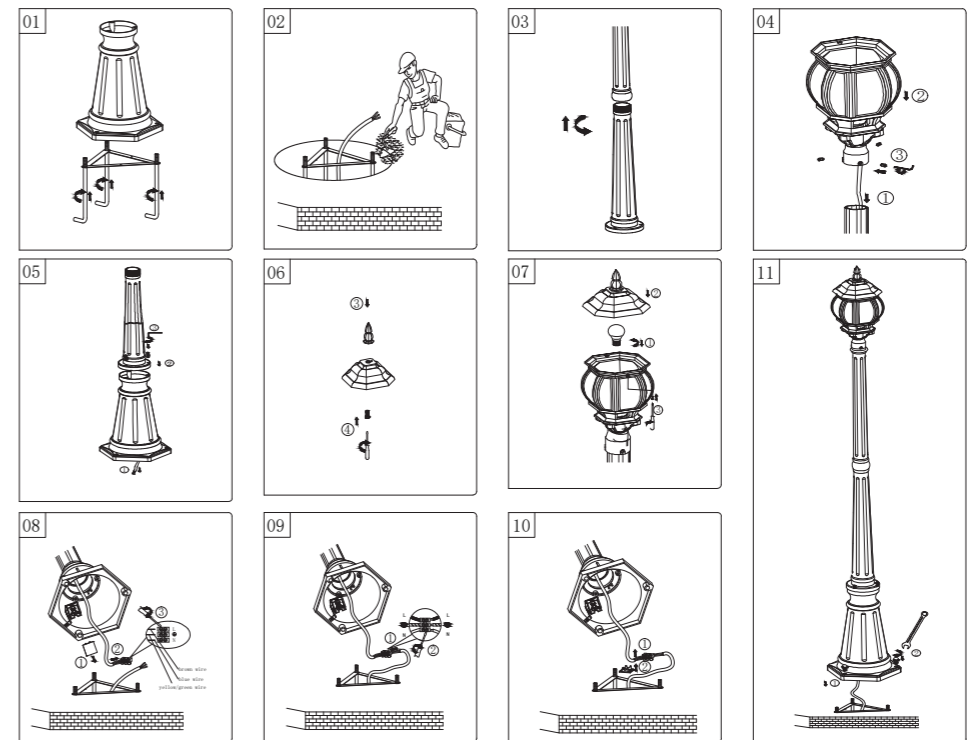

HV1673W-BLK

