Features

- Zigbee 3.0 compliant
- Touch capacitive switches
- Controls fan speed, fan on/off and light on/off
- Blue backlight to indicate switch status
- Retrofit to standard mounting brackets
- White, UV resistant material
- Combination head screws
- On/off & speed control via the app
- Customizable timers & schedules via the app
- Works with both Amazon Alexa and Google Assistant
- 3 year in-home warranty

Network/Device Requirements

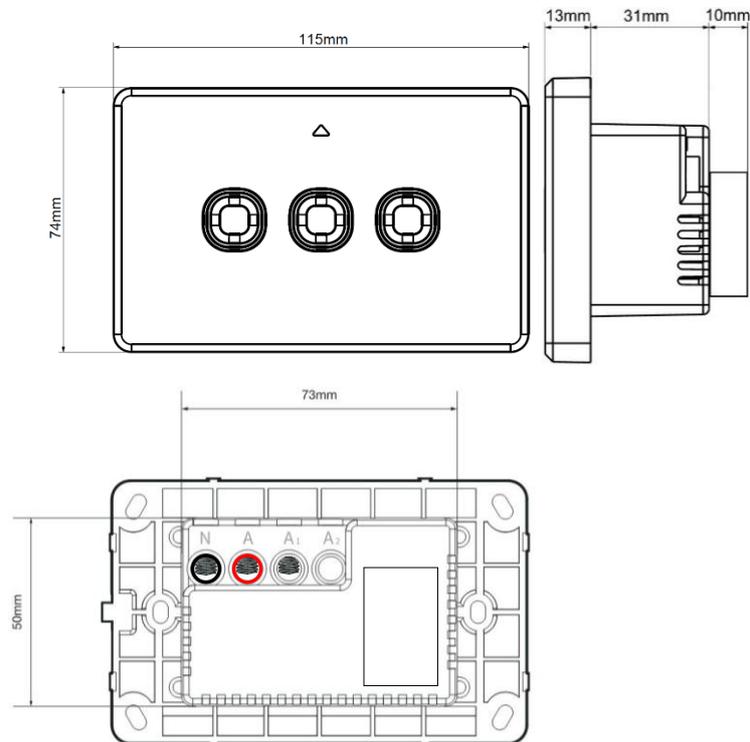|	
Connectivity	Zigbee
Requirements	Mercator Ikuü zigbee hub
Protocol	IEEE 802.15.4
Wireless Frequency	2.4GHz
App Requirements	Mobile device running iOS or Android. (Refer to ikuu.com.au for minimum specs)

Included Accessories

Faceplate, Cut-out template, Mounting screws

Technical Specifications

Neutral Required	Yes
Supply Voltage	230 - 250V a.c. 50Hz
Standby Wattage	<0.05W
Operating Load	Fan: up to 150W (max) LED light: up to 150W (max) Filament lamp: up to 1000W (max) Resistive load: up to 1000W (max)
Capacitance	3uF + 2uF
IP Rating	IP20 (indoor use only)
Terminal Size	6mm² (can fit up to 3 x 2.5mm² wires per terminal)
Colour	White
Rear Colour	Yellow
Housing Material	Polycarbonate
Contact Material	Brass
Weight	150g
Dimensions	115mm x 74mm x 54mm
Cut-out Dimensions	80mm x 50mm
Mounting Centres	84mm
Compliance / Standards	AS/NZS 4268, AS/NZS 60669.1, AS/NZS 60669.2.1, CISPR 15, CISPR 32

Dimensions

*Download the app using the QR code or visit the iOS or Google Play store.

www.ikuu.com.au

zigbee

works with the Google Assistant

WORKS WITH amazon alexa