

Viper Side Bend Haviflex 9.6w LED Strip Kit

Watts Per Metre	9.6w
Input Voltage	LED Driver = 240v Haviflex = 24v DC
IP Rating	Haviflex = IP67 LED Driver = IP20
Colour Temp	<div style="display: flex; gap: 5px;"> <div style="width: 10px; height: 10px; background-color: #FFD700; border: 1px solid black;"></div> 3000k <div style="width: 10px; height: 10px; background-color: #ADD8E6; border: 1px solid black;"></div> 4000k </div>
Lumens Per Metre	3000k = 500lm 4000k = 510lm
Beam Angle	120°
Size	6mm x 12mm
PCB	3oz
Wiring	Parallel
Bending Direction	Side - Max Bending Radius = 30mm
Lamp Expectancy	<50,000hrs
CRI	CRI>90
Dimmable	Yes - Triac Dimmable Driver included
LED Chip Type	COB
Included Driver	25w or 50w Dimmable Driver
No. of Chips Per Metre	320
Available Lengths	2000mm or 5000mm
Cutting Increments	50mm
Mounting	Mounting Clips or Optional Channels
Operating Temperature	0 - + 60° Celcius
Ambient Temperature	-20° - + 50° Celcius
Warranty	3 Years Replacement*




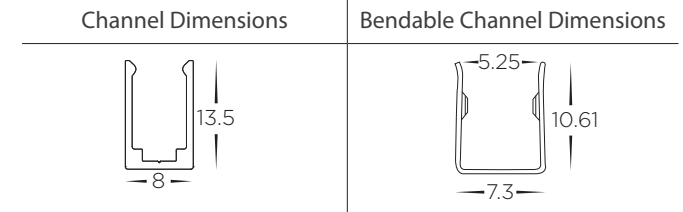


Image	Part Number	Description	Barcode
	VPR979-AC-2M	2M Aluminium Channel to suit Viper Haviflex Strip Kits	9350418033987
	VPR979-BC	Bendable Channel to suit Viper Haviflex Strip Kits (2x 500mm Lengths)	9350418033987



Photo of box

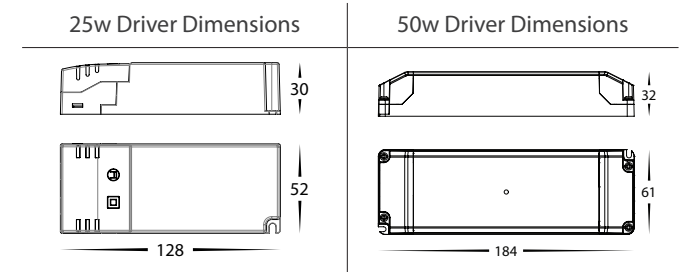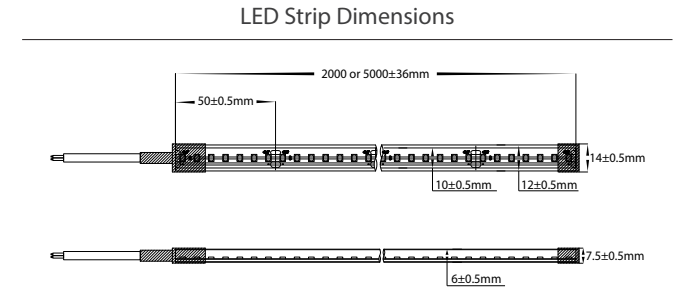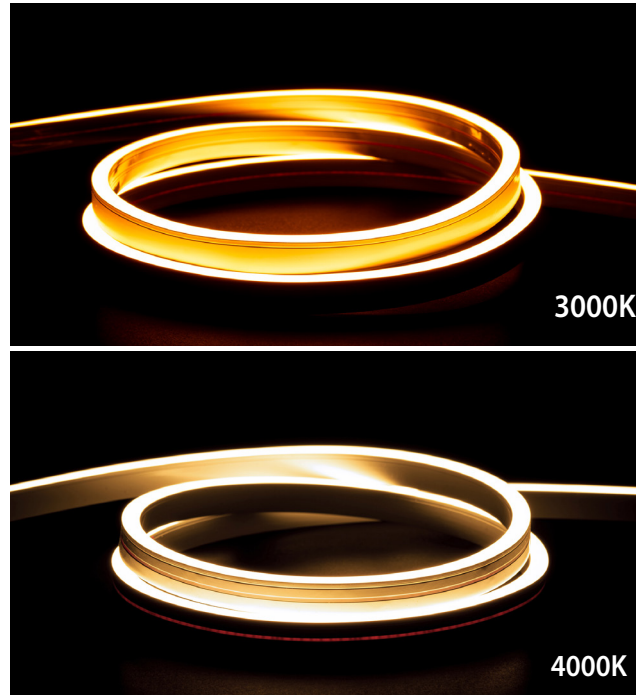

Included 25w Driver with 2m Length



Included 50w Driver with 5m Length



Mounting Clips

Mounting Clip Dimensions




Image	Part Number	Colour Temp	Lumens	Barcode
2m Length				
	VPR9793IP67-320-2M	3000k	500lm	9350418033987
	VPR9794IP67-320-2M	4000k	510lm	9350418033994
5m Length				
	VPR9793IP67-320-5M	3000K	500lm	9350418034007
	VPR9794IP67-320-5M	4000k	510lm	9350418034014

*See Warranty Terms & Conditions for more Information



Warranty Terms & Conditions Website