

ROTATY LED TOUCH DIMMER




Product Features

- Soft start
- Overload protection & short circuit protection
- Easy to mount in most Australia plates
- Suitable for dimming dimmable LED globes, incandescent globes, high voltage halogen globes, electronic transformers with low voltage halogen globes
- Rotating to turn on/off
- Comes with dimming knob suit most Australia plates
- IP rating: IP20
- 3 years replacement warranty

Load Compatibility

- Compatible loads with dimmable led lighting, maximum load 150w, minimum load 10w.
- Compatible loads with incandescent lighting 240V halogen lamps, maximum load 400w, minimum load 10w.
- Compatible loads with low voltage halogen lighting with electronic transformers, maximum load 400VA, minimum load 10VA
- No compatible with dl 1640/1650

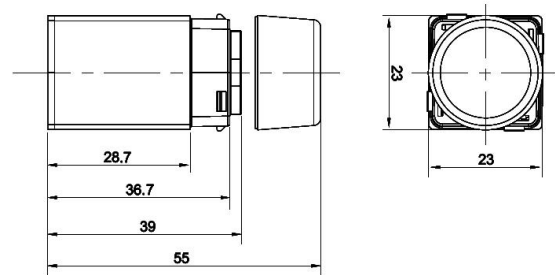

Technical Data

Rated voltage & frequency	220-240V AC 50Hz
Rated Power	10-400VA
Hi-Pot	Applying 3KVrms voltage between the surface of the button of the unit against its opening ends of two fly wires which are electrically connected together, the unit will not have trigger current higher than 1mA during the 1 minutes test duration
Environmental Requirement	Ambient temperature: 0 to 40°C Operating humidity: 10% to 95% RH, no condensing Storage temperature: 0 to 60°C Storage humidity: 10% to 95% RH, no condensing
Altitude	This product can only be operated at less than 2000 meters above to sea level
RoHS	The European Directive 2011/65/EU RoHS Compliance required
Reach	The European Union directive 1907/2006/EC Compliance required
Life time of rotary button	Min.20,000cycles
Wiring Practices	Comply with AS/NZS 3133
Logo of certification	CE,RCM
Size	23mm x 23mm x 55mm(W x L x H)